



2497
GB91 2497



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales


NP10 8QQ	
REC'D 05 JUL 2004	
WIPO	PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

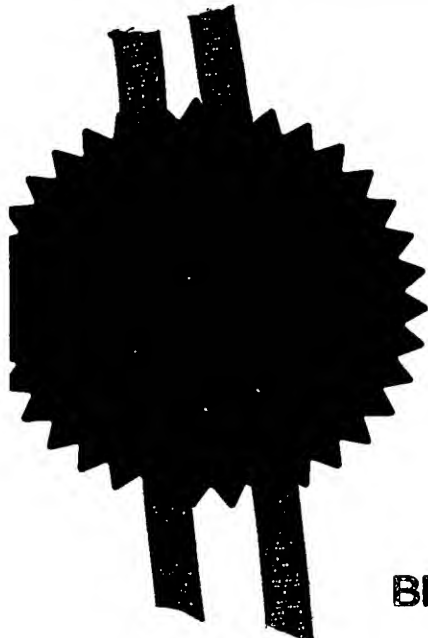

Signed

H. Behan

Dated 25 June 2004

BEST AVAILABLE COPY

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patents Form 1/77

Patents Act 1977
(Rule 16)

THE PATENT OFFICE

NA

16 JUN 2003

RECEIVED BY FAX

The
Patent
Office16 JUN 03 15:30:11 000077
P01/77/00 0.00-0313890.6**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH**1. Your reference**

CTV/P102863GB

2. Patent application number*(The Patent Office will fill in this part)*

0313890.6

16 JUN 2003

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*antenna Limited
Far Field House
Albert Road
Stow-cum-Guy
Cambridge
CB5 9ARPatents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

UK

8306060001

4. Title of the inventionHYBRID ANTENNA USING PARASITIC EXCITATION
OF CONDUCTING ANTENNAS BY DIELECTRIC
ANTENNAS**5. Name of your agent** *(if you have one)*

Harrison Goddard Foote

"Address for service" in the United Kingdom
to which all correspondence should be sent
*(including the postcode)*Belgrave Hall
Belgrave Street
Leeds
LS2 8DDPatents ADP number *(if you know it)*

14571001

7631310002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it) the or each application number*

Country

Priority application number
*(if you know it)*Date of filing
*(day / month / year)***7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application**

Number of earlier application

Date of filing
*(day / month / year)***8. Is a statement of inventorship and of right to grant of a patent required in support of this request?** *(Answer 'Yes' if)*a) any applicant named in part 3 is not an inventor, or **Yes**

b) there is an inventor who is not named as an applicant, or


c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

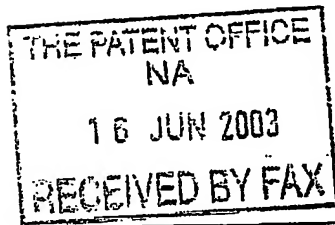

Continuation sheets of this form	0
Description	12 ✓
Claim(s)	2 ✓
Abstract	1 ✓
Drawing(s)	4 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	0
Request for preliminary examination and search (Patents Form 8/77)	1 ✓
Request for substantive examination (Patents Form 10/77)	0
Any other documents (please specify)	1 ✓

Cover letter, fee sheet, copy of GB0218820.9

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

16/6/2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Chris Vaughan

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

Duplicate

**HYBRID ANTENNA USING PARASITIC EXCITATION OF CONDUCTING
ANTENNAS BY DIELECTRIC ANTENNAS**

- The present invention relates to multi-band antenna structures and techniques for the construction thereof, by using dielectric antennas to excite other non-dielectric electrical parasitic structures. The dielectric antennas include, but are not limited to, dielectric resonator antennas (DRAs), high dielectric antennas (HDAs) and dielectrically loaded antennas (DLAs).
- 10 Dielectric resonator antennas are resonant antenna devices that radiate or receive radio waves at a chosen frequency of transmission and reception, as used in for example in mobile telecommunications. In general, a DRA consists of a volume of a dielectric material (the dielectric resonator) disposed on or close to a grounded substrate, with energy being transferred to and from the dielectric material by way of
- 15 monopole probes inserted into the dielectric material or by way of monopole aperture feeds provided in the grounded substrate (an aperture feed is a discontinuity, generally rectangular in shape, although oval, oblong, trapezoidal or butterfly/bow tie shapes and combinations of these shapes may also be appropriate, provided in the grounded substrate where this is covered by the dielectric material. The aperture feed
- 20 may be excited by a strip feed in the form of a microstrip transmission line, coplanar waveguide, slotline or the like which is located on a side of the grounded substrate remote from the dielectric material). Direct connection to and excitation by a microstrip transmission line is also possible. Alternatively, dipole probes may be inserted into the dielectric material, in which case a grounded substrate is not
- 25 required. By providing multiple feeds and exciting these sequentially or in various combinations, a continuously or incrementally steerable beam or beams may be formed, as discussed for example in the present applicant's co-pending US patent application serial number US 09/431,548 and the publication by KINGSLEY, S.P. and O'KEEFE, S.G., "Beam steering and monopulse processing of probe-fed
- 30 dielectric resonator antennas", IEE Proceedings - Radar Sonar and Navigation, 146,

3, 121 - 125, 1999, the full contents of which are hereby incorporated into the present application by reference.

5 The resonant characteristics of a DRA depend, *inter alia*, upon the shape and size of the volume of dielectric material and also on the shape, size and position of the feeds thereto. It is to be appreciated that in a DRA, it is the dielectric material that resonates when excited by the feed. This is to be contrasted with a dielectrically loaded antenna (DLA), in which a traditional conductive radiating element is encased in a dielectric material that modifies the resonance characteristics of the radiating
10 element. As a further distinction, a DLA has either no, or only a small, displacement current flowing in the dielectric whereas a DRA or HDA has a non-trivial displacement current.

15 Dielectric resonators may take various forms, a common form having a cylindrical shape or half- or quarter-split cylindrical shape. The resonator medium can be made from several candidate materials including ceramic dielectrics.

Since the first systematic study of dielectric resonator antennas (DRAs) in 1983 [LONG, S.A., McALLISTER, M.W., and SHEN, L.C.: "The Resonant Cylindrical
20 Dielectric Cavity Antenna", IEEE Transactions on Antennas and Propagation, AP-31, 1983, pp 406-412], interest has grown in their radiation patterns because of their high radiation efficiency, good match to most commonly used transmission lines and small physical size [MONGIA, R.K. and BHARTIA, P.: "Dielectric Resonator Antennas - A Review and General Design Relations for Resonant Frequency and
25 Bandwidth", International Journal of Microwave and Millimetre-Wave Computer-Aided Engineering, 1994, 4, (3), pp 230-247]. A summary of some more recent developments can be found in PETOSA, A., ITTIPOON, A., ANTAR, Y.M.M., ROSCOE, D., and CUHACI, M.: "Recent advances in Dielectric-Resonator Antenna Technology", IEEE Antennas and Propagation Magazine, 1998, 40, (3), pp 35 - 48.

30

A variety of basic shapes have been found to act as good dielectric resonator structures when mounted on or close to a ground plane (grounded substrate) and excited by an appropriate method. Perhaps the best known of these geometries are:

5 **Rectangle** [McALLISTER, M.W., LONG, S.A. and CONWAY G.L.:
"Rectangular Dielectric Resonator Antenna", Electronics Letters, 1983, 19, (6), pp
218-219].

10 **Triangle** [ITTIPOON, A., MONGIA, R.K., ANTAR, Y.M.M., BHARTIA, P.
and CUHACI, M.: "Aperture Fed Rectangular and Triangular Dielectric Resonators
for use as Magnetic Dipole Antennas", Electronics Letters, 1993, 29, (23), pp 2001-
2002].

15 **Hemisphere** [LEUNG, K.W.: "Simple results for conformal-strip excited
hemispherical dielectric resonator antenna", Electronics Letters, 2000, 36, (11)].

20 **Cylinder** [LONG, S.A., McALLISTER, M.W., and SHEN, L.C.: "The Resonant
Cylindrical Dielectric Cavity Antenna", IEEE Transactions on Antennas and
Propagation, AP-31, 1983, pp 406-412].

25 **Half-split cylinder** (half a cylinder mounted vertically on a ground plane)
[MONGIA, R.K., ITTIPOON, A., ANTAR, Y.M.M., BHARTIA, P. and CUHACI,
M.: "A Half-Split Cylindrical Dielectric Resonator Antenna Using Slot-Coupling",
IEEE Microwave and guided Wave Letters, 1993, Vol. 3, No. 2, pp 38-39].

30 Some of these antenna designs have also been divided into sectors. For example, a
cylindrical DRA can be halved [TAM, M.T.K. and MURCH, R.D.: "Half volume
dielectric resonator antenna designs", Electronics Letters, 1997, 33, (23), pp 1914 -
1916]. However, dividing an antenna in half, or sectoring it further, does not change
the basic geometry from cylindrical, rectangular, etc.

High dielectric antennas (HDAs) are similar to DRAs, but instead of having a full ground plane located under the dielectric resonator, HDAs have a smaller ground plane or no ground plane at all. DRAs generally have a deep, well-defined resonant frequency, whereas HDAs tend to have a less well-defined response, but operate over
5 a wider range of frequencies.

In both DRAs and HDAs, the primary radiator is the dielectric resonator. In DLAs the primary radiator is a conductive component (e.g. a copper wire or the like) and the dielectric modifies the medium in which the antenna operates, and generally
10 makes the antenna smaller. A simple way to make a printed monopole antenna is to extend a microstrip into a region where there is no grounded substrate on the other side of the board.

It is known that one dielectric resonator antenna can excite another one parasitically.
15 Indeed, the effects of parasitic dielectric resonator antennas on a cylindrical dielectric resonator antenna were studied as early as 1993 [Simons, R.; Lee, R.; "Effect of parasitic dielectric resonators on CPW/aperture-coupled dielectric resonator antennas", *IEE proceedings-H*, 140, pp. 336-338, 1993]. A similar study for a parasitic three-element array of rectangular dielectric resonator antennas was reported
20 in 1996 [Fan, Z.; Antar, Y.; Ittipiboon, A.; Petosa, A.; VV "Parasitic coplanar three element dielectric resonator antenna subarray", *Electronics Letters*, 32, pp. 789-790, 1996].

It is also known that a dielectric resonator antenna with one probe feed can have
25 another feed excited parasitically, i.e. the second feed is not driven by the electronic circuitry [Long, R.; Dorris, R.; Long, S.; Khayat, M.; Williams, J.; "Use of Parasitic Strip to produce circular polarisation and increased Bandwidth for cylindrical Dielectric Resonator Antenna", *Electronics Letters*, 37, pp. 406-408, 2001].

There appear to be no reports in the literature, however, of dielectric antennas being used to excite conventional antennas such as patches, PILAs (planar inverted-L antennas), dipoles, slot antennas, etc.

- 5 According to the present invention, there is provided an integrated antenna device comprising a first, dielectric antenna component and a second, electrically-conductive antenna component, wherein the first and second components are not electrically connected to each other but are mutually arranged such that the second component is parasitically driven by the first component when the first component is
10 fed with a predetermined signal.

- For the avoidance of doubt, the expression "electrically-conductive antenna components" defines a traditional antenna component such as a patch antenna, slot antenna, monopole antenna, dipole antenna, planar inverted-L antenna (PILA) or any
15 other antenna component that is not a DRA, HDA or DLA.

Additionally, for the purposes of the present application, the expression "dielectric antenna" is hereby defined as encompassing DRAs, HDAs and DLAs.

- 20 Embodiments of the present invention thus relate to the use of DRAs, HDAs and DLAs as primary radiating structures to excite parasitically more conventional conducting antennas which serve as secondary radiating structures. Furthermore, embodiments of the present invention relate to the use of a DRA, HDA or DLA as a primary radiating structure comprised as a piece or pellet of high dielectric constant
25 ceramic material excited by some form of feed structure on a printed circuit board (PCB) substrate or the like. The secondary, parasitic radiating structure has no feed and is driven by mutual coupling with the DRA, HDA or DLA and may be of a more conventional design made from copper or other conducting materials.

Advantageously, the first and second components are configured to radiate at different frequencies, thus providing at least a dual band integrated antenna device, and in some embodiments a four band integrated antenna device.

- 5 The first, driven antenna component may advantageously be configured as a dielectric antenna comprising a dielectric pellet mounted on a first side of a dielectric substrate, a microstrip feed located on the first side of the substrate and extending between the substrate and the dielectric pellet or contacting a side wall thereof, and a
10 conductive layer formed on a second side of the substrate opposed to the first, wherein an aperture is formed in the conductive layer or the conductive layer is removed from the second side of the substrate at a location corresponding to that of the dielectric pellet.

- Alternatively, the first, driven antenna component may be configured as a dielectric
15 antenna comprising a microstrip feed located on a first side of a dielectric substrate, a conductive layer formed on a second side of the substrate opposed to the first and having an aperture formed therein, wherein a dielectric pellet is mounted on a second side of the substrate within or at least overlapping the aperture.

- 20 In these embodiments, the driven antenna component is an HDA.

The dielectric substrate may be a printed circuit board (PCB) substrate.

- Dielectric antennas of these types are more fully described in the present applicant's
25 copending UK patent application no 0218820.9 of 14th August 2002, the full disclosure of which is hereby incorporated into the present application by reference, a copy of the earlier application being filed with the present application.

- The second, parasitic antenna component may be located adjacent the first, driven
30 antenna component on the dielectric substrate, or may extend over a top surface of the first antenna component.

The second, parasitic antenna component may be dielectrically loaded, for example with a pellet of low E_r dielectric material.

- 5 In a particularly preferred embodiment, the first antenna component comprises a dielectric antenna as defined in the preceding paragraphs, and the second antenna component comprises a parasitic non-dielectric PILA configured to radiate at a higher or lower frequency than the first antenna component.
- 10 Integrated antenna devices of the present invention are particularly suited to mobile telephony and data terminal (e.g. WLAN or Bluetooth®) applications.

The first antenna component is preferably configured to radiate such that it covers a high band frequency range (e.g. 1710 to 2170 MHz).

15

The second antenna component is preferably configured to radiate such that it covers a low band frequency range or ranges (e.g. 824 to 960 MHz).

- 20 It will be appreciated, however, that the first antenna component may cover a low band frequency range and the second antenna component may cover a high band frequency range. In this way, the smaller size of the second parasitic antenna component may allow the use of more than one with each dielectric antenna component, thereby allowing more bands to be covered by the parasitic antenna components.

25

In some embodiments, a sidewall of the dielectric pellet (e.g. a surface of the pellet generally perpendicular to the plane of the dielectric substrate) may be metallised (e.g. by coating with a metal paint or the like).

- 30 In embodiments specifically using a DRA as the first antenna component (i.e. with a conductive groundplane under the pellet), the dielectric pellet will generally need to

be formed in a predetermined shape or configuration so as to resonate in a desired mode and/or at a desired frequency. The relationship between shape and configuration of a dielectric pellet and its resonance response in a DRA are well-known to those of ordinary skill in the art.

5

In embodiments specifically using an HDA as the first antenna component (i.e. with no or only some conductive groundplane under the pellet), almost any shape of pellet may be used, since the frequency response is much less well defined.

- 10 An alternative to the parasitic arrangement discussed above is to have two feed networks, one driving a PIFA (planar inverted-F antenna), for example, and the other driving the dielectric antenna. A feed combination can then be used to provide a single feed point for the antenna arrangement. However, feed combining is a lossy process and involves microstrip tracks occupying a significant additional board area.

15

For a better understanding of the present invention and to show how it may be carried into effect, reference shall now be made by way of example to the accompanying drawings, in which:

- 20 FIGURE 1 shows a driven dielectric antenna provided with a parasitic PILA;

FIGURE 2 shows a broadband dielectric antenna mounted in a corner of a PCB with a parasitic PILA passing over a top of the dielectric antenna;

- 25 FIGURE 3 shows a dielectric antenna mounted in a corner of a PCB with a parasitic PILA adjacent thereto but not passing over the dielectric antenna;

FIGURE 4 shows a practical hybrid antenna design shaped to fit inside a modern mobile telephone handset casing;

30

FIGURE 5 shows an oblong dielectric antenna mounted on a PCB with a parasitic PILA passing thereover;

FIGURES 6(a) and 6(b) show an underside of the PCB of Figure 5 with part of a groundplane removed from a corner portion thereof;

FIGURE 7 shows a dual band WLAN antenna comprising a driven dielectric antenna and a parasitic PILA mounted adjacent thereto; and

FIGURE 8 shows an S_{11} return loss plot of the antenna of Figure 7.

Figure 1 shows a general example of an oblong dielectric ceramics pellet 1 with an upper surface 2 and a lower surface 3, the lower surface 3 being contacted by a direct microstrip feedline 4, which may be made of copper or the like. A PILA 5, which is made of an electrically-conductive material (e.g. copper), is arranged so as to pass over the upper surface 2 of the pellet 1. The PILA 5 is not electrically connected to the pellet 1 or the feedline 4, but instead is excited parasitically when the pellet 1 is caused to radiate when fed with a signal by the feedline 4. The PILA 4 radiates at a different frequency to the pellet 1, and thus a dual band hybrid antenna is formed.

Figure 2 shows a first particularly preferred embodiment of the present invention comprising a triangular dielectrics ceramic pellet 1 mounted in a corner of a PCB substrate 6. The PCB substrate 6 may be a PCB of a mobile telephone handset (not shown), and may be provided with a conductive groundplane 7 on a surface opposed to that on which the pellet 1 is mounted. The pellet 1 is excited by a direct microstrip feedline 4 that is formed on the surface of the substrate 6 and contacts the pellet 1, either on a side surface thereof or an underside thereof. A connector 8 is provided for connecting the feedline 4 to a signal source. The dielectric antenna component of this embodiment may be a broadband dielectric antenna (e.g. an HDA). A PILA 9 is also provided, the PILA 9 being supported by a shorting bar 10 which electrically connects the PILA 9 to the groundplane 7 and holds the PILA 9 in position over the

top surface 2 of the pellet 1. It is to be noted that the PILA 9 is shaped and configured so as to make maximum use of a width of the PCB substrate 6.

5 The hybrid antenna of Figure 2 may be configured as a four-band handset antenna by using a broadband high dielectric antenna in the corner of the PCB substrate 6 to radiate over the 1800 GSM, 1900 GSM and WCDMA bands (1710-2170 MHz). The PILA 9 may be configured as a 900 MHz GSM band (880-960 MHz) PILA that passes over the top of the pellet 1 and is parasitically excited thereby.

10 Figure 3 shows a second particularly preferred embodiment of the present invention, similar to that of Figure 2, but distinguished in that the PILA 9 does not pass over the top of the pellet 1, but stops short thereof. An optional capacitive loading flap 11 may provided by folding down an edge portion of the PILA 9 parallel to a diagonal edge 12 of the pellet 1. The flap 11, where provided, helps to lower a frequency of
15 operation of the PILA 9 and to compensate for the smaller area of the substrate 6 that is used. The configuration of the second preferred embodiment allows the PILA 9 may be mounted closer to the PCB substrate 6 and thereby helps to provide an antenna with a lower overall height (measured perpendicular to the substrate 6).

20 The hybrid antenna of Figure 3 may also be configured as a four-band handset antenna by using a broadband HDA to cover the wideband, as in the first preferred embodiment, and to excite a 900 MHz GSM band PILA 9 that does not pass over the top surface 2 of the pellet 1.

25 Figure 4 shows a third preferred embodiment of the present invention corresponding generally to that of Figure 3, but with a corner portion of the pellet 1, a corner portion of the PILA 9 and corner portions of the substrate 6 provided with a curved shape so as to conform to a shape of a modern mobile telephone handset casing (not shown). In addition, the PILA 9 is shown without a capacitive loading flap 11.

30

Figure 5 shows a fourth preferred embodiment of the present invention comprising an oblong dielectric pellet 1' mounted diagonally on the PCB substrate 6 and extending from a central part thereof into a corner thereof. A conductive groundplane 7 is provided on a surface of the substrate 6 opposed to that on which the pellet 1 is located. A PILA 9 of the type shown in Figure 3 is provided and passes over the pellet 1'. This embodiment uses less ceramic dielectric material in the pellet 1' than the embodiments of Figures 2 to 4, and therefore weighs less.

Figures 6(a) and 6(b) show alternative configurations of the embodiment of Figure 5 from underneath the PCB substrate 6. In Figures 6(a) and 6(b), a portion 13 of the groundplane 7 has been removed in a region corresponding generally to a location of the pellet 1' on the other side of the substrate 6. The removed portion 13 of the groundplane 7 may have a pointed or curved shape as shown, or may be removed along a diagonal or have any other appropriate shape. By removing an area 13 of the groundplane 7 under the pellet 1', the bandwidth can be adjusted to as to suit the number of bands that are to be serviced by the antenna. The efficiency of the antenna may also be adjusted in this manner.

Figure 7 shows a fifth preferred embodiment of the present invention comprising a dual band Wireless LAN antenna designed to operate in the Bluetooth/WLAN802.11b band (2.4 - 2.5 GHz) and the WLAN802.11a bands (4.9 - 5.9 GHz). The WLAN antenna consists of a driven dielectric antenna comprising an oblong high E_r dielectric ceramics pellet 1'' mounted on a direct microstrip feedline 4 printed on one side of a PCB substrate 6. A parasitic PILA 9 is provided adjacent the pellet 1'', the PILA 9 being further provided with a low E_r dielectric loading pellet 14 which also contacts the feedline 4. The dielectric pellet 1'' radiates in the upper band and the PILA 9 radiates in the lower band. The combination results in a device having a single feed point but with the dual band performance shown in the S_{11} return loss plot of Figure 8.

In alternative preferred embodiments (not shown), there may be provided a hybrid antenna as generally as described above in relation to Figures 1 to 8, but in which the driven dielectric antenna component radiates at a lower frequency and the parasitic element radiates at a higher frequency. The smaller size of the higher frequency
5 parasitic antenna component may allow the use of more than one parasitic antenna component and thus may achieve coverage of further bands.

The preferred features of the invention are applicable to all aspects of the invention and may be used in any possible combination.

10

Throughout the description and claims of this specification, the words "comprise" and "contain" and variations of the words, for example "comprising" and "comprises", mean "including but not limited to", and are not intended to (and do not) exclude other components, integers, moieties, additives or steps.

CLAIMS:

1. An integrated antenna device comprising a first, dielectric antenna component and a second, electrically-conductive antenna component, wherein the first and second components are not electrically connected to each other but are mutually arranged such that the second component is parasitically driven by the first component when the first component is fed with a predetermined signal.
2. A device as claimed in claim 1, wherein the first antenna component comprises a dielectric resonator antenna formed as a dielectric pellet mounted on a first side of a dielectric substrate and provided with a feeding mechanism, a second, opposed side of the dielectric substrate being provided with a conductive groundplane covering at least an area corresponding to an area on the first side occupied by the pellet.
3. A device as claimed in claim 1, wherein the first antenna component comprises a high dielectric antenna formed as a dielectric pellet mounted on a first side of a dielectric substrate and provided with a feeding mechanism.
4. A device as claimed in claim 1, wherein the first antenna component comprises a dielectrically loaded antenna.
5. A device as claimed in any preceding claim, wherein the second antenna component is a patch antenna, slot antenna, monopole antenna, dipole antenna or planar inverted-L antenna.
6. A device as claimed in any preceding claim, wherein the first and second antenna components are configured to radiate at different frequencies.
7. A device as claimed in claim 3 or any claim depending from claim 3, wherein the first antenna component comprises a dielectric pellet mounted on the first side of

a dielectric substrate, a microstrip feed located on the first side of the substrate and extending between the substrate and the dielectric pellet, and a conductive layer formed on a second side of the substrate opposed to the first, wherein an aperture is formed in the conductive layer or the conductive layer is removed from the second side of the substrate at a location corresponding to that of the dielectric pellet.

8. A device as claimed in claim 3 or any claim depending from claim 3, wherein the first antenna component comprises a dielectric antenna comprising a microstrip feed located on a first side of a dielectric substrate, a conductive layer formed on a second side of the substrate opposed to the first and having an aperture formed therein, wherein a dielectric pellet is mounted on a second side of the substrate within or at least overlapping the aperture.

9. A device as claimed in any preceding claim, wherein the second antenna component is located adjacent the first antenna component.

10. A device as claimed in any preceding claim, wherein the second antenna extends over a top surface of the first antenna component.

11. A device as claimed in claim 6 or any claim depending therefrom, wherein the first antenna component is adapted to radiate at a frequency lower than the second antenna component.

12. A device as claimed in claim 6 or any claim depending therefrom, wherein the first antenna component is adapted to radiate at a frequency higher than the second antenna component.

13. An integrated antenna device substantially as hereinbefore described with reference to or as shown in the accompanying drawings.

ABSTRACT**HYBRID ANTENNA USING PARASITIC EXCITATION OF CONDUCTING
ANTENNAS BY DIELECTRIC ANTENNAS**

5

An integrated antenna device comprising a first, dielectric antenna component and a second, electrically-conductive antenna component, wherein the first and second components are not electrically connected to each other but are mutually arranged such that the second component is parasitically driven by the first component when the first component is fed with a predetermined signal.

10

15 P102863gb.spc

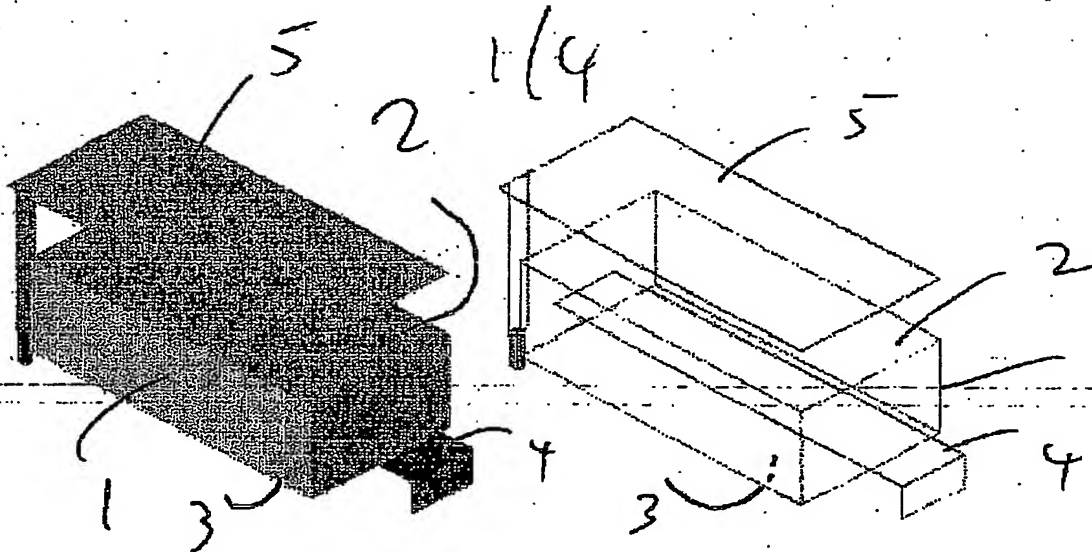


Figure 1. A general example of how a non-driven PILA can be excited and made to radiate by a dielectric antenna driven and radiating at a different frequency.

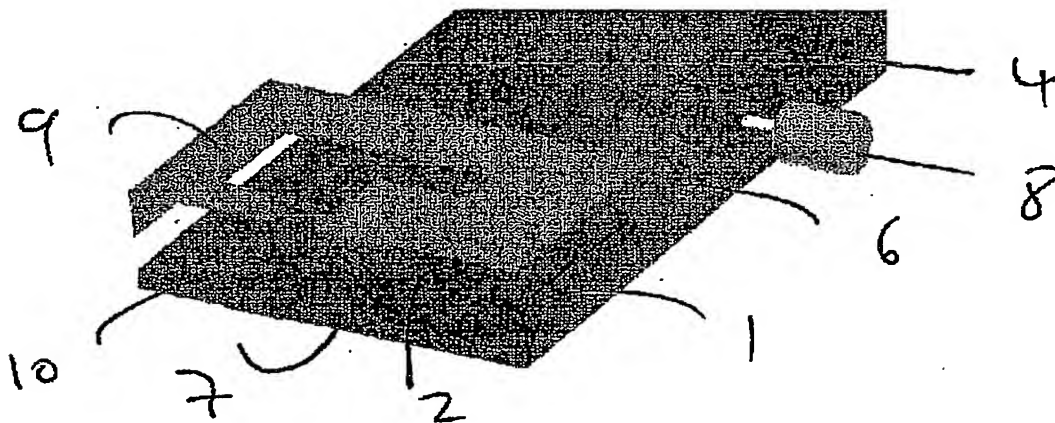


Figure 2. Broadband dielectric antenna in the corner of a handset PCB exciting a 900 MHz GSM band PILA that passes over the top of it. The PILA makes maximum use of the board area available.

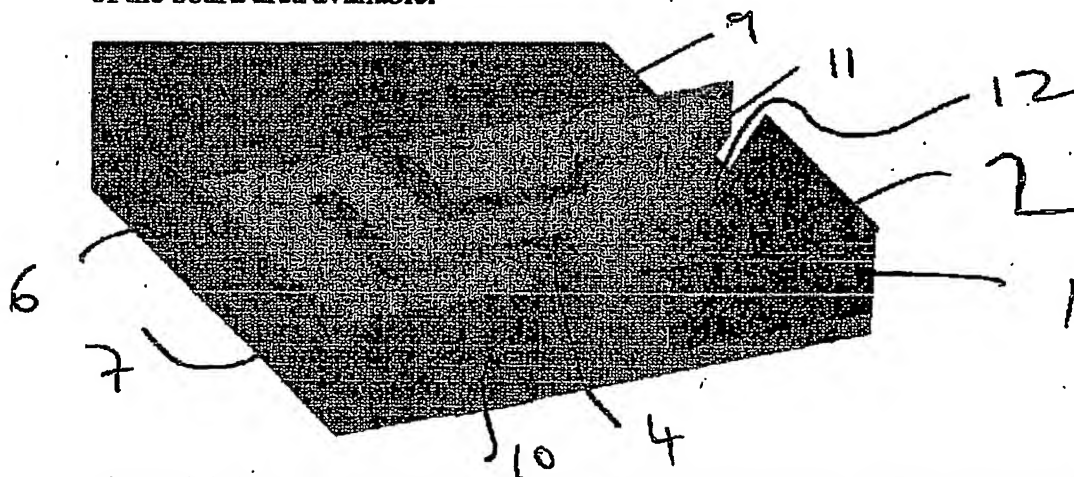


Figure 3. Dielectric antenna in the corner of a PCB exciting a PILA that does not pass over the top of it.

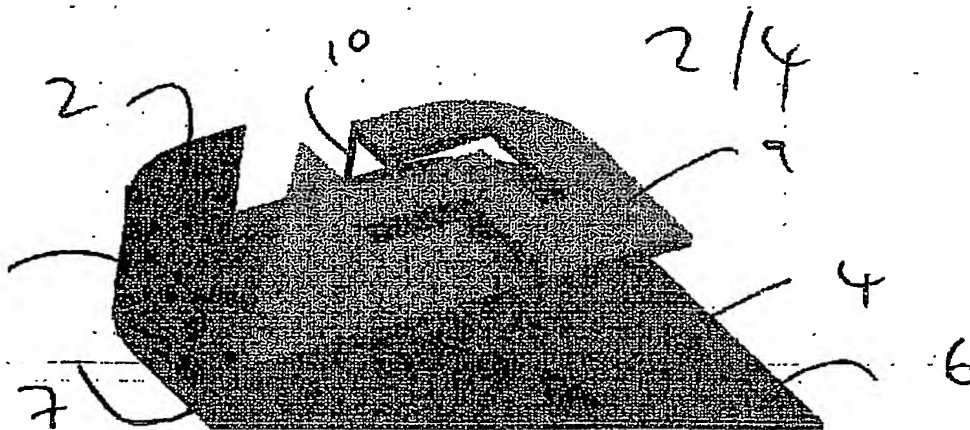


Figure 4. Practical hybrid antenna design shaped to fit into modern handset casings.

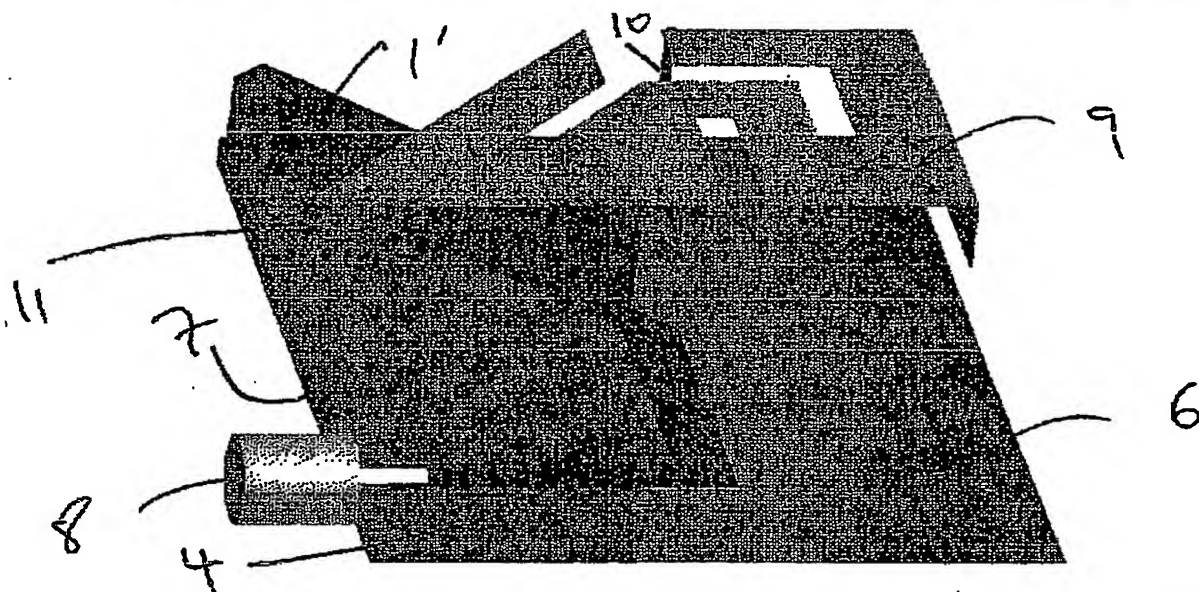


Figure 5. An alternative design using less ceramic material than in the designs shown in figures 2-4 above, and therefore weighing less.

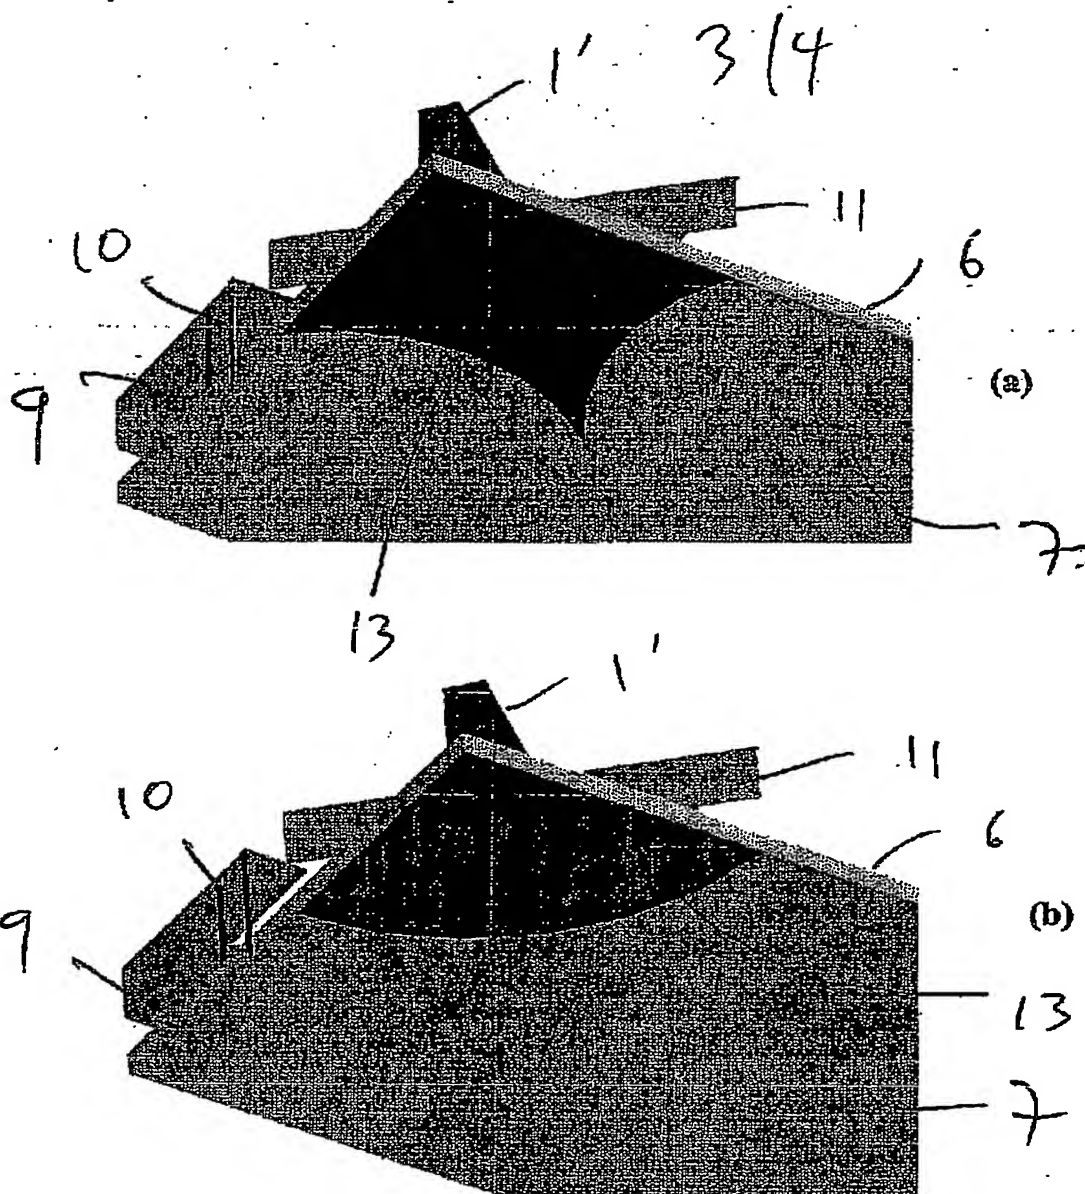


Figure 6. The groundplane may be removed diagonally across the corner or in other shapes as in (a) and (b) above. There are design advantages to modifying the shape including the bandwidth and efficiency performance.

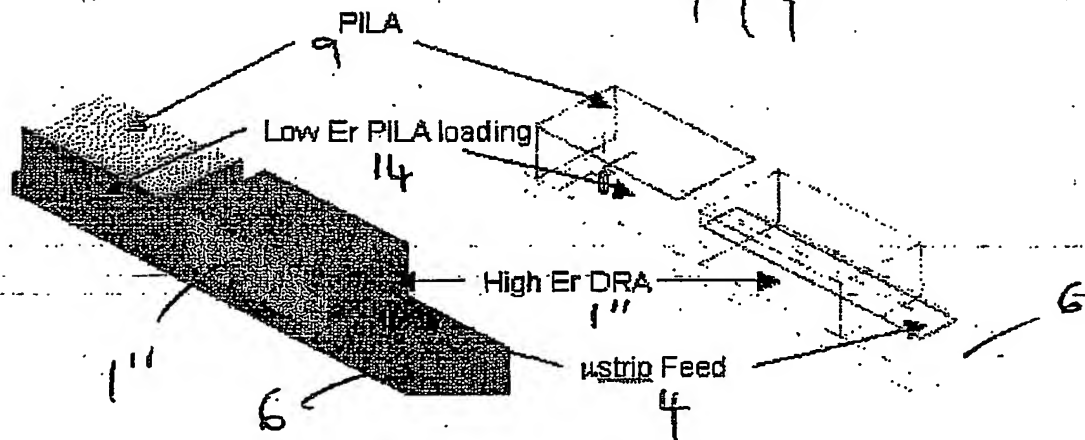


Figure 7 Dual band WLAN antenna covering the 802.11a&b bands using a driven dielectric antenna and a parasitic PILA.

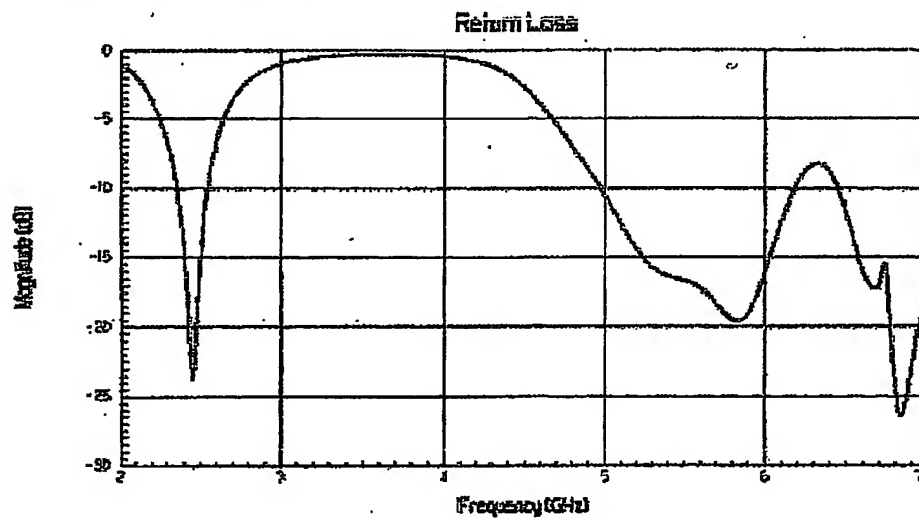


Figure 8. The S_{11} return loss plot of the antenna shown in figure 7.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.